

# BULLETIN

# Endura<sup>®</sup> Solids Interceptors

# Available in $2^n$ , $3^n$ & $4^n$ connection sizes and may accommodate flow rates up to 125 GPM.

The management of solids and debris entering the drain - and ultimately the grease interceptor - is equally as important to manage as the grease itself. Large quantities of solids reduce the working volume of the grease interceptor, significantly impairing performance.

Additionally, debris entering the drain will increase the risk of blockage at the flow control device which could result in costly clogs and back-ups. The Endura Solids interceptors offer solutions for small to medium output applications; using the benefits of the Endura design concept with different internal components to provide proactive prevention of solids-related issues.




#### **Features and Benefits:**

#### **Endura Solids Basket:**

- Compatible with full height interceptors 15gpm to 50gpm
- Easy to remove and maintain
- Removable dual screen filtration
- Integrated lifting handles
- Enhanced grease interceptor performance

#### **Common Uses:**

- Food solids
- Laundry lint
- Hair
- Art room waste
- Grit and sand



### Contact us


Visit our website: ipexna.com / enduragreasemanagement.com

Eastern U.S. Toll free: (800) 463-9572 Western U.S. Toll free: (888) 461-5307

Endura® is a registered trademark.



Endura Solids Interceptor Installation - Typical on Floor / Semi-Recessed

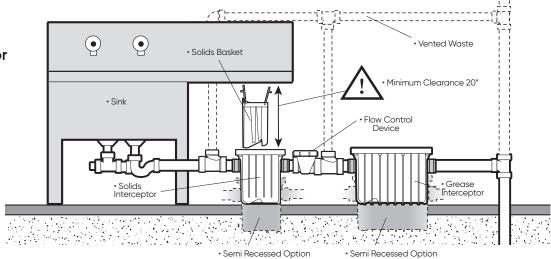

NOTE: Solids Interceptor must be installed before flow control device.

# **Endura® Solids Basket Accessory Installation Instructions**

The Solids Basket Accessory is designed to be able to replace the inlet baffle of your Endura® grease interceptor. It can be fitted to any full height model from 15 GPM to 50 GPM.

#### 1. Remove Baffles

Remove the inlet and outlet baffles from the interceptor by pulling vertically on the lifting locations.


#### 2. Install Solids Basket


Insert the solids basket accessory into the inlet location pushing it all the way down until it bottoms out.


Max Flow


Rate

60 GPM









### 4" Hub Solids Interceptor

Part	Product	Max Flow
Number	Code	Rate
4011A04	766163	125 GPM

## Solids Basket Accessory

Part	Product	Max Flow
Number	Code	Rate
3911A-1	763126	N/A

Technical Support: tech-support@endurainterceptor.com